

Quick Start Guide



24-Port Gigabit Unmanaged PoE+ Switch

1 Features


- Conforms to IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3af, IEEE 802.3at.
- Provides 24 10/100/1000Base-T ports and 2 Gigabit Combo ports.
- Provides 24 PoE+ injector and 370W Built-in power supply.
- High back-plane bandwidth 52 Gbps.
- IEEE 802.3x Flow control
- 6KV Surge protection



Notice: The transmission distance is related to the connected cable. Standard Cat5e/6 network cable and the quality of camera will help maximize the furthest distance possible.

2 Product Introduction

The 24-Port PoE Gigabit Ethernet Switch is tailored for security monitoring applications, offering seamless integration with HD surveillance systems and Ethernet projects. Engineered with specialized features to meet the demands of security monitoring, this product boasts rapid packet forwarding capabilities. Its gigabit transfer rates ensure ample bandwidth for high-definition video, guaranteeing crisp images and uninterrupted transmission.

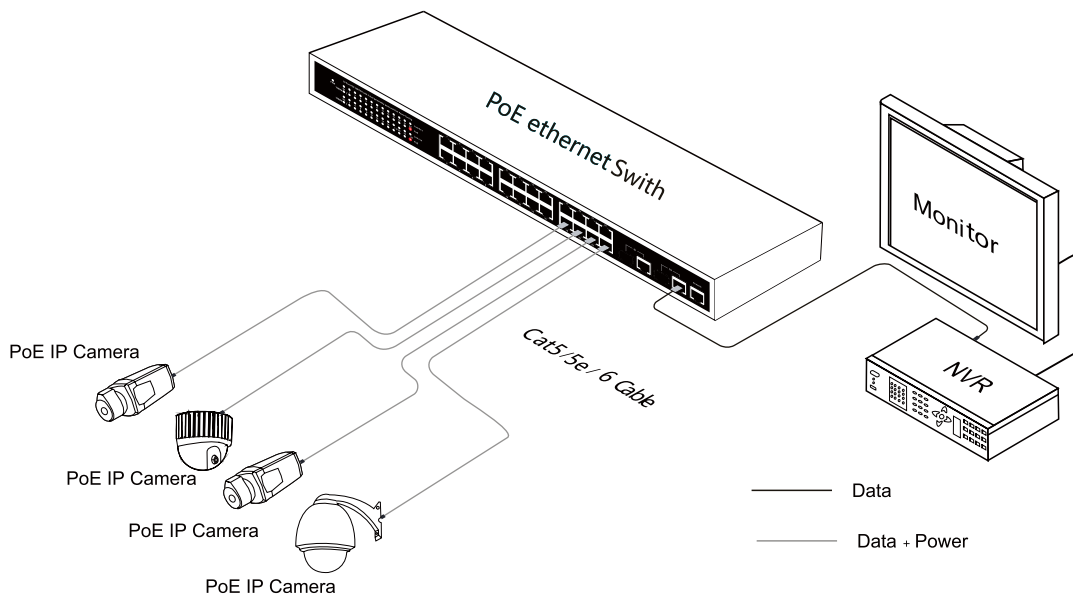

3 Specifications

	Item	Description
Power	Power supply	Built-in power supply
	Voltage Range	AC100~240V
	Consumption	370W for 24 PoE
Ethernet	Speed	1~24 Port: 10/100/1000Mbps 25~26: Gigabit Combo
	Transmission Distance	100Meter(328ft)for RJ-45 2Km 20Km for SFP Port The optical module is optional
	Ethernet Standard	IEEE802.3/802.3u/802.3ab/802.3z/802.3af/802.3at
Network Switch	Switching capacity	52G
	Transfer Rate	14,880pps for 10Mbps
		148,800pps for 100Mbps
		1,488,000pps for 1000Mbps
LINK / ACT	MAC Address	8K MAC address table
	On Green	The port is connected
	Blinks -	The port is receiving or transmitting data
POE	Off -	The port is not linked successfully with the device
	On Green	PD is connected
	Off -	No PD is connected or power forwarding fails
Enviro-nment	PoE pin assignment	V+(RJ45 Pin 1,2), V-(RJ45 Pin 3,6)
	Working Temperature	0~40 °C
	Storage Temperature	-40~70 °C
Mecha-nical	Humidity Non condensing	0~90%
	Dimension	440 x 200 x 44mm
	Color	Black

Specification change will not be noticed

4 Installation Steps

Please check the following items before installation, if it is missing, please contact the dealer.

- 24-Port Gigabit Unmanaged PoE+ Switch 1pcs
- AC power cable 1pcs
- Accessory 1pcs
- User manual 1pcs


Please follow the below installation steps

- 1) Please turn off the signal power and display device power before installation, installation with power will damage the transmission equipment.
- 2) Use a network cable to connect the PoE IP camera or other devices to 1-24 POE port of the PoE Switch.
- 3) Use a network cable to connect equipment to the uplink port and NVR or computer.
- 4) Connect AC power.
- 5) Check if the installation is correct equipment is in good condition the connection is stable then provide power for system.
- 6) Ensure the Ethernet equipment with power and work properly.

5 Board Diagram

24-Port Gigabit Unmanaged PoE+ Switch

Front board

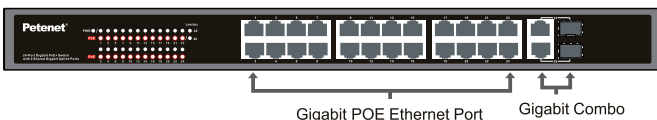

Back board



6 Troubleshooting

Please follow the steps if the equipment has trouble

- Make sure the equipment is installed according to the manufacture's installation guide.
- Confirm RJ45 cable order meets EIA/TIA 568A or 568B standard.
- Every PoE port can provide PoE equipment maximum power less than 30W, please do not connect the PoE equipment with power over 30W.
- Replace the equipment with a proper functioning 24 ports PoE Ethernet Switch to check if the equipment is damaged.
- Please contact your vendor if trouble still exists.

7 Plug Producing Method

Instruments to be used: wire crimper, network tester and wire sequence of RJ45 plug should conform with EIA/TIA568A or 568B.

- 1) Please remove 2cm of the insulating layer and bare 8 pairs UTP cable
- 2) Separate the 8 pairs UTP cable and straighten them.
- 3) Line up the 8 pieces of cables per EIA TIA 568A or 568B.
- 4) Cut off the cables to leave 1.5cm bare wire.
- 5) Plug 8 cables into RJ45 plug make sure each cable is in each pin.
- 6) Use the wire crimper to crimp it.
- 7) Repeat above 6 steps to make the another ends.
- 8) Use network tester to test the cable if it works.

Pin	Color	1	8	Pin	Color	1	8
1	White / Green			1	White / Orange		
2	Green			2	Orange		
3	White / Orange			3	White / Green		
4	Blue			4	Blue		
5	White / Blue			5	White / Blue		
6	Orange			6	Green		
7	White / Brown			7	White / Brown		
8	Brown			8	Brown		

EIA / TIA 568A

EIA / TIA 568B



Notice:

When choosing RJ45 make sure if one end is EIA / TIA568A. the other end should also be EIA / TIA568A. When choosing RJ45 make sure if one end is EIA / TA568B. the other end should also be EIA / TIA568B.